



IP Wall-mounted Terminal, 2*15&2*30 IP Amplifier

Features:



- ▶ This network terminal with built-in digital amplifier 2*15 and 2*30 at high quality sound
- ▶ Empowered by high-speed dual-core (ARM + DSP) chip of industrial grade, startup in less than 1s
- ▶ Compact in Size and easy to install

- ▶ Support MP3, WMA, WAV and more decoding
- ▶ With a standard RJ45 network interface and supports online firmware upgrade from long distance

Model with suffix "POE" means power supply from POE; with suffix "S" means SIP version

POE Power adaptor

From POE router

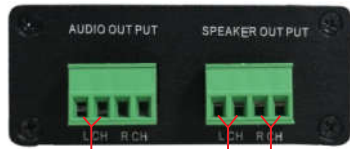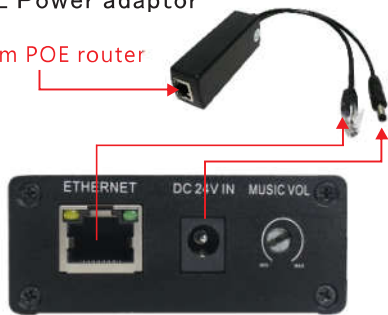

If you need bigger power, can link audio output to external booster amplifier

to 2pcs of 8 ohm speaker at 15W



Model	IPT-215POE/IPT-215POES	IPT-230/IPT-230S
Network Communication Protocol	IP, ARP, ICMP, DHCP, UDP, DNS, IGMP (SIP for IPT-215POES)	IP, ARP, ICMP, DHCP, UDP, DNS, IGMP (SIP for IPT-230S)
Network Interface	10/100Base-TX, RJ45	10/100Base-TX, RJ45
RMS Power	2*15W	2*30W@8Ω
Decoding	MP3/WMA/WAV	MP3/WMA/WAV
Frequency Range	20Hz~20KHz	20Hz~20KHz
POE adaptor	Yes	0~85°C
Operating Temp.	0~85°C	No
Power consumption	Less than 300mW	Less than 300mW
Power Supply	DC 12-24V or POE	DC 24V
Dimension	100 x 66 x 26 mm	153 x 100 x 26 mm