




### 2 & 4-CH Bluetooth Wall Amplifier with Android

This 2/4 channel small Bluetooth multi-home audio system equipped with micro USB/TF can power 2 to 8 pieces of speakers in your home or small commercial area. It uses a high-efficiency class-D amplifier for a maximum output of 2\*25/4\*25 watts, low-impedance speakers. The cool display shows relevant track music info. Plus, you can control everything—seek, change tracks, and adjust the volume.

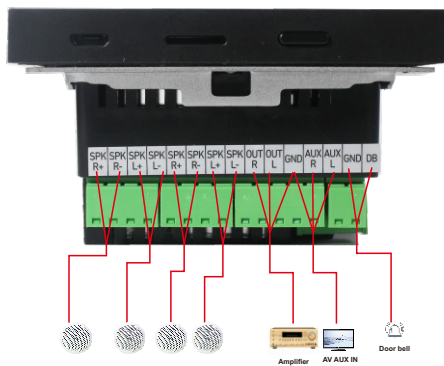

#### Features

- ▶ With RJ45 interface for both hard cat 5 cable or WIFI connection
- ▶ Adopt Bluetooth and WIFI wireless connection technology
- ▶ Standard 86 Mounted on the wall for easy control
- ▶ Rs485 protocol for integration (2-CH)
- ▶ Download APP like Spotify, Pandora etc. to it to play music from internet
- ▶ Support triggering doorbell function
- ▶ Support audio input and output function with secure and fast connect phoenix connectors
- ▶ Support TF card and OTG 2.0USB interface, USB can be connected to the hard disk;
- ▶ Suitable for homes, commercial areas, kid's room, etc.

Model	BA-225ADi	BA-425ADi
Output power	2*25W	4*25W
Speaker Impedance		4-8ohm
System		Android 11
Body memory		1GB
Expand TF card memory		8GB, Scalable to 32G
Network		WIFI
CPU		Cortex 1.2G (Quad core)
Display		4inch capacitive touch screen
Resolution		480*480 IPS
Bluetooth wireless range		≤10M
USB		OTG USB
THD		0.03% (1W.1KHZ)
Frequency response		20 Hz-20 kHz (+/-2dB)
SNR		98db
Music format		Mp3, WMA, WAV, AAC, WAW, APE, OGG, etc.
Video format		MPEG-1/2/3/4, RM/RMVB, WMV, MOV, MK, VOB, AVI, 3GP, H, 264, etc.
Power Requirements		110-250VAC
Audio		Aux audio input and outputs
Dimension		86*86*38mm
Weight		0.7kg