



Dante Speaker: Dante DP 430

Description

Dante DP PoE Speaker can realize its multifunction the POE power supply or 24VDC, audio transmission and signal control via a RJ45 Ethernet port. It can obtain power supply from any Ethernet switch of 802.3 or above standard.

Over Dante™ Ethernet that transmits 24-bit audio (44.1K/48KHz) and its control signal can be routed through the Dante™ Controller. All these functions can perform remotely on the PC or Mac by Dante Controller Software.

Ordering Code

DANTE DP 430:


30W Dante Wall Speaker with External 24V DC power supply

DANTE DP 430 POE:

30W Dante Wall Speaker with POE power supply

DANTE DP 430 POE With DSP:

30W Dante Wall Speaker with POE power supply and DSP

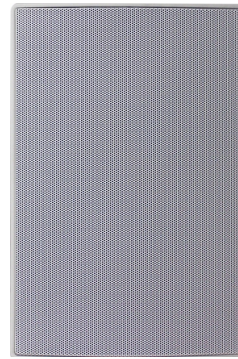

Front



Rear



Side

MODEL

Dante DP 430

Input Interface	RJ-45
Audio Input Signal	Dante™ Balanced amplified signal
Cable	Cat-5 or above
Output Power	30W
Transmission Rate	100M/1000M bps
Frequency Range	80Hz - 20kHz
Sensitivity	90dB 1w/1m
Sound Pressure Level	108dB (peak)
Total Harmonic Distortion	<0.30%
Signal to Noise Ratio	>100dB
Noise Floor	<200uV
System Efficiency	>70%
Enclosure	ABS
Operation Temperature	-10 to 50 Degree
Color	RAL-9010
Dimension	(High)295 x (Width)195 x (Depth)155mm
Net Weight	2.6kg

Example Diagram

