



High Performance 3 way speaker;with crossover

Features:


- ▶ 3-way ABS in ceiling speaker at high performance
- ▶ With kevlar driver
- ▶ With crossover to produce clear yet powerful sound
- ▶ Good for high music demand applications



MODEL	CP-8100L
Output Power	100W
SPL (1W/1M)	90dB
Frequency Range	40hz to 20khz
LF	8 inch Graphite Cone, rubber edge
MF	3 inch glass fiber cone, PU edge
HF	1 inch Titanium dome
Enclosure Material	ABS
Impedance	8 ohm
Size	dia 294mm*162mm
hole cut size	255mm
Finish	White

H means with fire dome

- ▶ High Performance 2 way speaker
- ▶ With heavy duty fire dome and power selection switch
- ▶ Good for high music demand applications.

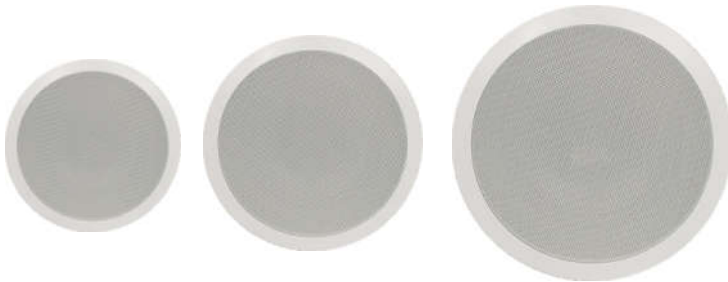

MODEL	CP-521T;CP-521TH	CP-621T;CP-621TH	CP-821T;CP-821TH
Power at 100V	20W;20W/10W/5W/8 ohm	30W;30W/15W/7.5W/8 ohm	40W;40W/20W/10W/8 ohm
Power at 70V	10W; 10W/5W/2.5W/8 ohm	15W; 15W/7.5W/3.8W/8 ohm	20W; 20W/10W/5W/8 ohm
SPL(1W/1M)	88dB	88dB	88dB
Max SPL@ 1M	101dB	102dB	103dB
Freq. Response	100Hz-20KHz	90Hz-20KHz	50Hz-20KHz
Cutout Size	Dia 170mm	Dia 200mm	Dia 240mm
Product Size	Dia203x80mm(H);x145mm(H)	Dia230x90mm(H);x150mm(H)	Dia270x105mm(H);x185mm(H)
Installation	Inceiling	Inceiling	Inceiling
Enclosure Material	ABS	ABS	ABS
Weight	1.25; 1.7Kg	1.6; 2.2Kg	2.1; 3.1Kg
Finish	White	White	White
Speakers	1" x1 (TREBLE) 5.25"x1(BASS)	1" x1 (TREBLE) 6"x1(BASS)	1" x1 (TREBLE) 8"x1(BASS)