




Vandal proof wall mount speaker

WM-506VP

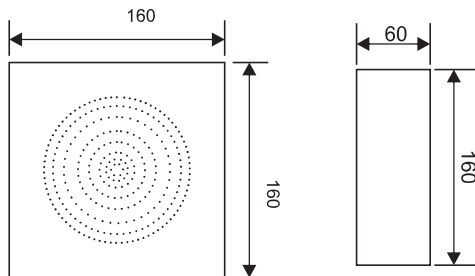

- ▶ Conform to Fire protection Norm-BS 5839
- ▶ Corrosion-resistant powder coating
- ▶ Ceramic clamp + thermofuse
- ▶ Ball proof
- ▶ Vandal proof

SPECIFICATIONS	WM-506VP
Frequency response	120-10KHz
Sensitivity(1M/1W)	92dB
Power handling	6W
Power taps	0.75W/1.5W/3W/6W
Line Input	100V
Dimension	160*160*60mm
Material	Iron
Component	5"
Finished color	Grey
Character	Non-flammable
Unit weight	1.4kg
Speaker	
Voice coil size	PSV 14.28*0.1*2 player
DC impedance	7.3Ω
Former	Paper
Magnet	Ferrite(106g) Dia 55*24*10(Y30)
Basket	Iron
Cone material	Paper
Spider	Cloth
Dust cap	Paper
Net weight	220g

In-wall speaker

WP-550L

- ▶ Edgeless in wall speaker
- ▶ High performance with crossover



MODEL	WP-550L
Power at 100V	50W at 8 ohm
Power at 70V	NA
SPL(1W/1M)	89dB
Max SPL@ 1M	107dB
Freq. Response	75Hz-20KHz
Dispersion Angel	90 degree
Product Size	345x158x75mm
Installation	In wall
Enclosure Material	ABS
Weight	1.6Kg
Finish	White
Speakers	1" x1 (TREBLE) 5.25"x2(BASS)

In-wall speaker

WP-540L

- ▶ Edgeless in wall speaker
- ▶ High performance with crossover



MODEL	WP-540L
Power at 100V	40W at 8 ohm
Power at 70V	NA
SPL(1W/1M)	89dB
Max SPL@ 1M	106dB
Freq. Response	80Hz-20KHz
Dispersion Angel	90 degree
Product Size	220x130x70mm
Installation	In wall
Enclosure Material	ABS
Weight	1.6Kg
Finish	White
Speakers	1" x1 (TREBLE) 5.25"x1(BASS)