
Wall Amplifier with Alexa

LUCKY TONE

Features:

- ▶ Voice Control: Features Amazon Alexa voice control for convenient hands-free operation.
- ▶ Smart Home Device Control: Integrated with Amazon Alexa to control smart home devices.
- DLNA and Airplay Support: Seamlessly push music, videos, pictures, files, and APKs from your mobile device to the host for playback or installation.
- Support online video playback: Watch online movies with ease.
- ▶ WIFI and Wired Network Connection: Ensures flexible and reliable internet connectivity options.
- ▶ Android Application Installation: Compatible with various types of Android software for enhanced functionality.
- ▶ 7-inch Multi-Touch Capacitive Screen: Provides an intuitive and responsive user interface.
- ▶ Infrared Remote Control: Includes support for traditional IR remote control functionality.
- Versatile Connectivity: Equipped with Bluetooth, USB, TF card, and HDMI, allowing a variety of audio sources to be connected seamlessly.

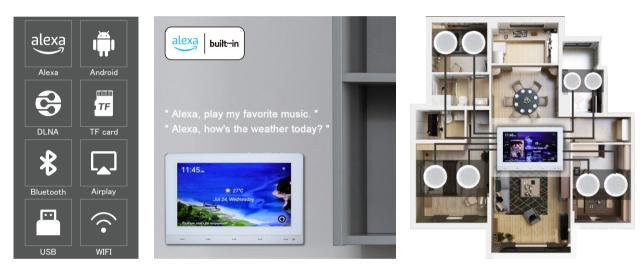

SPECIFICATIONS	BA-830A
Output power	8x30W
Max. power	8×60W
Speaker Impedance	4–8ohm
System	Android 11
RAM	2GB
ROM	16GB
WiFi	2.4G distance15meters
	5.8G distance15meters
CPU	Cortex1.6Ghz quad-core A53
Display	7inch HD touch screen
Resolution	1024*600 IPS
Bluetooth wireless range	10M
USB	OTG USB
THD	0.03% (1W.1KHZ)
Frequency response	20 Hz-20 kHz (+/-2dB)
SNR	98db
Music format	Mp3, WMA, WAV, AAC, WAW, APE, OGG, etc.
Video format	MPEG-1/2/3/4, RM/RMVB, WMV, MOV, MK, VOB, AVI, 3GP, H, 264, etc.
Power Requirements	110-250VAC
Wiring box size	181x114x70mm
Product size	186.5x122x48.8mm
Weight	670g